

*Available for 18", 20" and 24" wide lockers only


Tools Required:

- 7/16" Wrench
- Phillips Screwdriver


Parts




HANG BAR
QTY - 1




HANG BAR BRACKET
2.25 SPREAD
QTY - 1



HANG BAR BRACKET
1.625 SPREAD
QTY - 1



1/4-20 x 1" SCREW
QTY - 2



1/4" WASHER
QTY - 4



1/4-20 NUT
QTY - 2

THANK YOU FOR CHOOSING GEARGRID for smarter, stronger, storage solutions.



670 SW 15th Street, Forest Lake, MN 55025 | Toll Free: 888-643-6694 | 651-464-4468 | Fax: 651-464-4780
sales@GearGrid.com | www.geargridcorp.com

GEARHANGER™ Kit Installation

Step 1: Position hang bar as shown in the photos below.




Step 2: Insert screw and washer through bracket and place a washer and nut on the other side to secure bracket as shown in the photo below. Repeat for the other bracket.

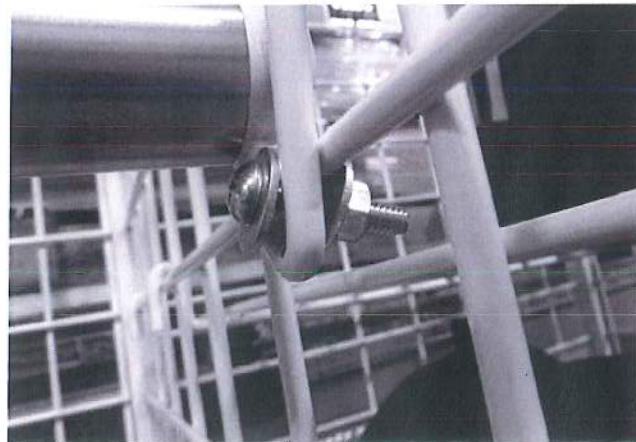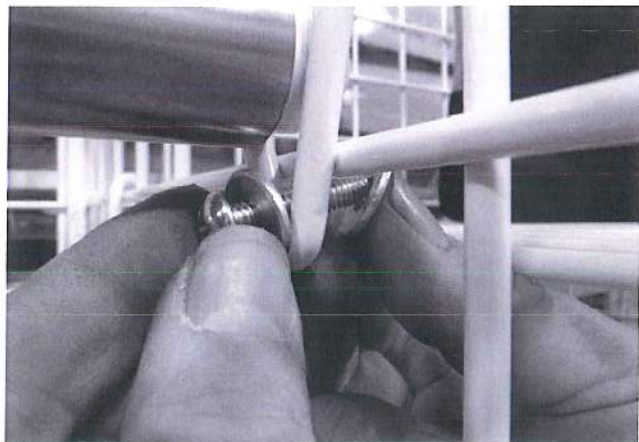

GEARGRID

The Smarter, Stronger Storage Solution

GEAR HANGER KIT INSTALLATION INSTRUCTIONS

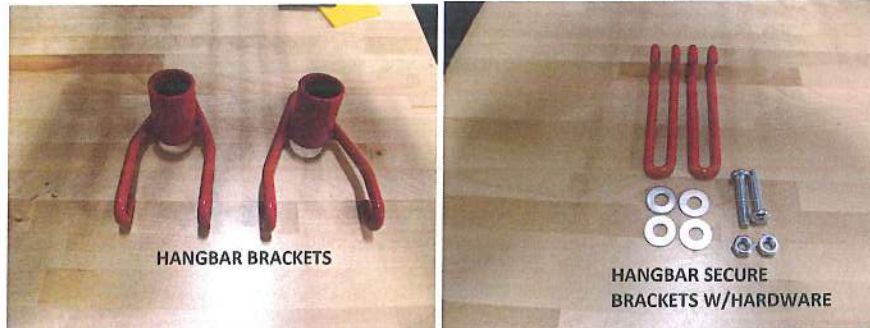

Step 1. Grab (1) Hangbar bracket and hang on the inside of the side/end panel as shown in the picture below. Next grab stainless tube and insert onto the Hangbar bracket as shown in the picture below.



Step 2. Then grab the second Hangbar, insert into other end of tube and then position bar so that it sits straight. (See photo)



Step 3. Grab both Hangbar Secure brackets and place them inside of the Hangbar Brackets. (See Photo) make sure Secure Brackets are placed on the outsides of the side panles/Grids. Next, grab bolt and washer and insert them through brackets, then grab second washer and nut and screw nut onto bolt (See photo) do this step for both sides...Now tighten Hardware.

